


Shelby GT500 Supercharger Pulley Tool

A. Removing the stock pulley

Assembly the tool as shown in the diagram below. Use the small washer as a thrust bearing against the supercharger shaft, and the silver pilot threaded in the tool. A small amount of EP grease should be used on the washer face, and the threads to aid in the pulley removal. Turn the forcing screw with a large wrench or a bar and socket to remove pulley from shaft.

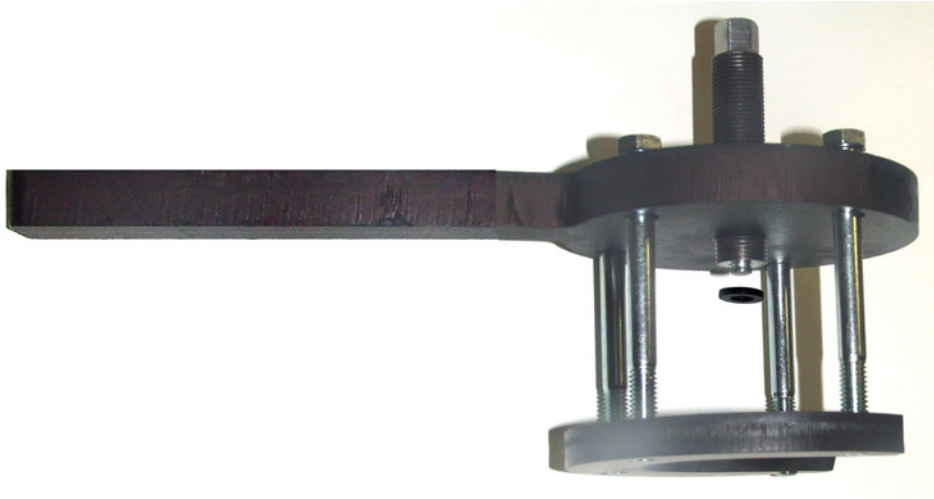

B. Installing the new supercharger pulley hub

Assembly the tool as shown in the diagram below. Thread the insert into the end of the forcing screw, and lubricate the thrust washers with EP grease to aid in installation. Use a wrench to hold the forcing screw from rotating, while turning the large nut to slide the hub onto the shaft.

